



STORAGE & SHELF LIFE

Store in a shaded area away from direct sunlight, between 5-45 °C. Protect from extreme temperatures.

Shelf life of ZycoFix is 48 months when stored as recommended.

PACKING

1 & 5 kg.

Manufactured by
Zydex Industries

Zydex House, 61 Gotri-Sevasi Road, Gotri,
Vadodara-390 021, Gujarat, India.

Customer Care No. : 1800-3000-7144

Email : waterproof@zydexindustries.com

www.zydexindustries.com

Disclaimer

Whilst the information contained herein is true, accurate and represents our best knowledge and experience, no warranty is given or implied with any recommendations made by us, our representatives or distributors, as the conditions of use and the competence of any labour involved in the application are beyond our control.


Version : May 2018



SUPER STRONG STONE & TILE BONDER



Strong - Flexible - Waterproof Bonding



SUPER STRONG STONE & TILE BONDER

A new generation nano technology.
Provides very strong, flexible & water resistant bonding.

ZycoFix^{Ultra}

For Granite, Stones, Marble
upto 4 m² Size


ZycoFix^{Super}

For Large Tiles
upto 4 m² Size

ZycoFix^{Regular}

For Tiles
upto 0.25 m² Size

Tiles joined by ZycoFix
Bond strength 3.4 tonnes / cm²

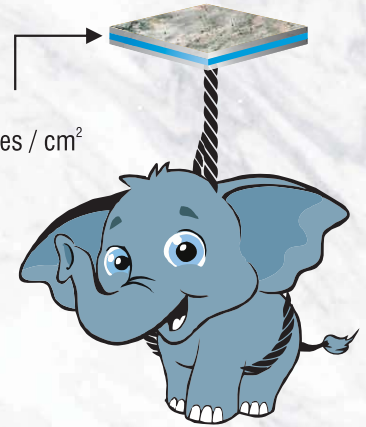

APPLICATION METHOD

- There is no need to soak the tile in water before ZycoFix Application.
- Brush / Spray the relevant grade of ZycoFix (Regular / Super / Ultra) on the reverse of the tile / stone / marble / granite. Let it dry for 15-30 minutes.
- For highly porous stones, first apply one coat of **Zydex Elastobar** on the reverse side of the stone. Let it dry for 6-8 hours. Then apply **Zycofix Ultra** on the **Elastobar treated surface**.
- For Granite, Marble, Stone and Large Tiles **only** (> 60 cm x 60 cm), apply '**Ultra**' or '**Super**' grade of ZycoFix on the plastered or concrete surface on which the cladding is to be fixed.
- Next, within 1-2 hours of ZycoFix application, apply a mortar layer (1:2 Cement & Sand mix) on the plastered surface. (2-4 mm for smaller tiles < 60 cm x 60 cm, 3-5 mm for large tiles & 6-8 mm for large stones / granite / marble)
- Immediately fix the Tiles / Stone / Granite / Marble on the wet mortar, allow a curing period of 28 days under normal weather conditions for best results.

Never mix ZycoFix with cement.

COVERAGE

3.5 - 4 m² (40-45 ft²) per kg.
(may vary depending upon surface roughness & porosity)